


K21-30 RS

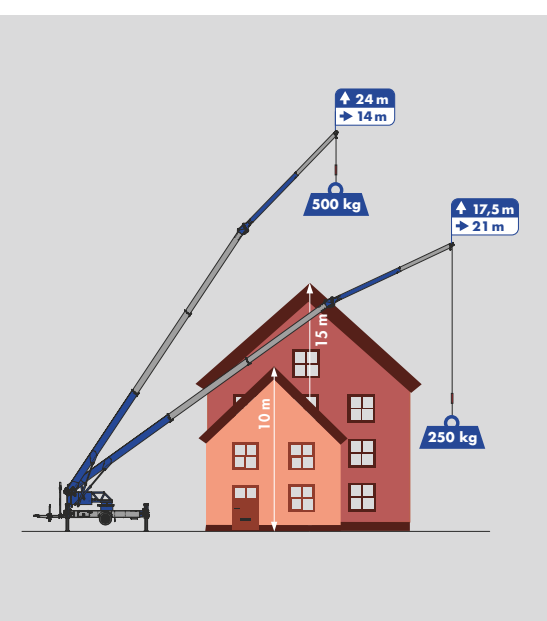

Hook height 29.8 m / Boom length 30.7 m

Max. capacity 1,500 kg

21 m Working range with 250 kg




K21-30 RS

Equipment



Klaas Boom system




H-Outriggers



Twin luffing cylinders



Double derricking cylinders



Telescopic winch



Continuous rotation



Crane control system




Radio remote control



Drive concept



Full panelling




Retractable drawbar



Self-drive mechanism



Accessory fix system (opt.)



Automatic levelling (opt.)


Technical specifications

Hook load	1,500 kg
Hook height	29.80 m
Boom length	30.70 m
Outrigger width (min.)	2.85 m
Outrigger width (max.)	5.04 m
Winch capacity	1,500 kg
Boom (1.500 kg)	5.46 m
Extension 1 (800 kg)	9.12 m
Vehicle dimensions	9.24 x 2.28 x 2.59 m
Towing capacity	3.5 t

Working range

Load	Working range	Height
1,500 kg	4.50 m	22.00 m
1,000 kg	8.00 m	20.80 m
800 kg	9.50 m	24.50 m
500 kg	14.00 m	24.00 m
250 kg	21.00 m	17.50 m

Working range diagram

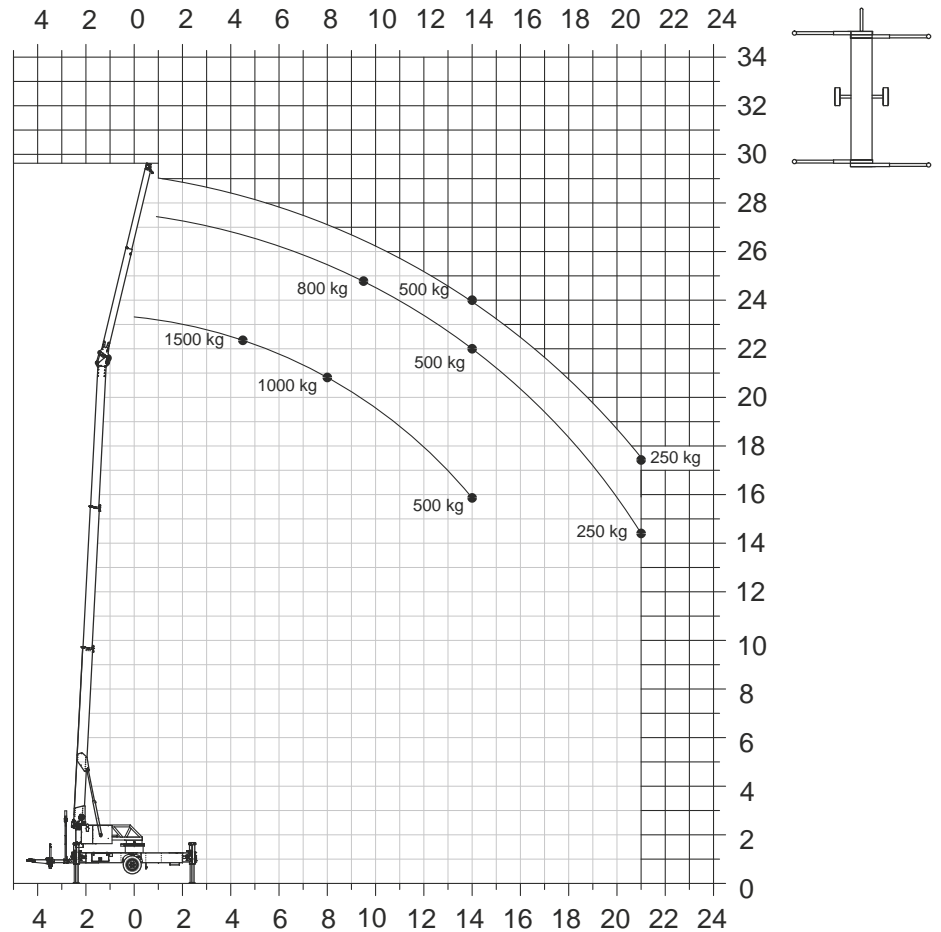

KLAAS Service- & Vertriebs GmbH

Raiffeisenstraße 26 · D - 59387 Ascheberg
 Phone.: +49 (0)2593 - 95 92 - 0
 info@klaas.com