

Option

**Jib**

Auxiliary boom for increasing the working range.

**Auxiliary winch**


Auxiliary winches make work efficiently in various working conditions.

**Radio remote controller**

Proportional remote control system enables accurate operation at a safe distance.

**Overloading prevention device**

This safety device automatically stops winch hoisting, boom extension and boom elevation, when the load exceeds the overload limits.

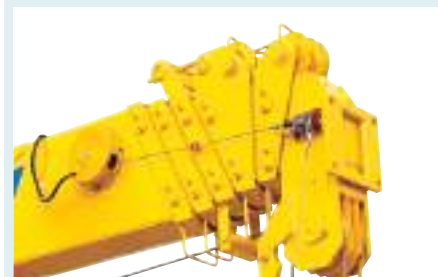**Overwinding prevention device**

This safety device automatically stops winch hoisting, boom extension and boom elevation, when the hook block approaches the boom head.

**Slewing locking system**

- * Light duty - By self locking system with worm gear
- * Medium duty - By self locking system with worm gear and an external locking cylinder
- * Heavy duty - By self locking system with worm gear and internal locking cylinder

**Wire rope retaining roller**

In order to prevent a wire from getting twisted or uncoiling when a wire is touched by the ground or payload, a retaining roller is installed in the wire drum.

**Uncoiling limiter for winch cable**

In order to prevent dangerous situations like the falling of a wire or payload, an uncoiling limiter is installed in the wire drum, and it makes automatically a wire stop before entirely coming loose from the wire drum.

**Rear outrigger**

For a wide-working range and better stability on an uneven or sloping ground.



Soosan Cranes

**Head Office & Hwasung Plant**

109-2, Songsan-Ri, Yanggam-Myeon, Hwasung-Si, Gyunggi-Do, Korea
TEL +82-31-350-5112 FAX +82-31-350-5259

Soosan China

No. 23 Rixin-road, Jimei, Xiamen, Fujian, China
TEL +86-592-621-1230 FAX +86-592-621-3231

Soosan Europe

Ohmweg 18, 3208 KE, Spijkenisse, The Netherlands
TEL +31-181-64-7194 FAX +31-181-64-1038

Soosan Dubai

P.O. BOX : 262280, LOB14-340 Jebel Ali Free Zone, Dubai, UAE
TEL +971-4-881-0502 FAX +971-4-881-0503

Soosan Mexico

Paseo Reforma No. 373 Torre Indigo Piso 11 Col. Juarez, 06600 Mexico, D.F.
TEL +52-55-5207-0160 FAX +52-55-5207-0099

Soosan Russia

690091, Vladivostok, St. Uborevycha 5a (Dinas), 7th floor, Russia
TEL +7-4232-652-700 FAX +7-4232-436-470

POWER TO
SUCCESS

www.soosanheavy.com

Copyright Soosan. Soosan reserves the right to alter specifications without prior notice

Printed in Korea
English Ver. 2012. 4

SOOSAN CRANES

Telescopic & Articulated booms, Crane Augers



* **Safety package** is consisted of overloading prevention system, over winding alarm device, braking system in the slewing mechanism, wire rope retaining roller, temperature sensor, filter pollution intensity indicator, uncoiling limited for winch cable, inclinometer

Outstanding features

SOOSAN cranes features a remarkable lifting power and rugged durability.



Light duty cranes : 2.2 ton ~ 5 ton class

Applicable truck chassis : payload 2.5 ton~11 ton

Medium duty cranes : 6 ton ~ 7.6 ton class

Applicable truck chassis : payload 5 ton and above

Heavy duty cranes : 10 ton ~ 20 ton class

Applicable truck chassis : payload 11 ton and above

Stationary base



Applications and features

- Providing time-saving, cost-effective and reliable load handling solutions for construction and civil engineering, factory, oil and gas field, logistics, military logistics, mining, port and shipyard, general transport, municipalities, public utilities etc.
- Combination of telescopic boom and winch with wire rope enables easy and efficient operation for material handling even in confined a work space such as deep-underground, high-rise buildings, under bridges etc.
- Low noise, silent winch with automatic brake system.
- **Safety devices** : Pressure relief valve, over-center valve, over-winding alarm device, pilot check valves for outriggers, swing locking device etc.
- **Optional features** : JIB boom, auxiliary winch, overloading prevention device, remote controller, oil cooler etc.

Optimum design by FEM (Finite Element Method, load-stress distribution simulation) maximizes work efficiency.

Light-duty cranes ; 2.2 ton ~ 5 ton class

Cranes in lifting capacity from 2.5 ton to 5 ton are mounted on a small and medium sized truck chassis. Cranes in this range are compact, versatile and ideal for a variety of light duty jobs such as telecommunication facilities, billboards and signboards, streetlamps, urban environment work, public utilities etc.



Wide range of boom types for various working environments

from 3-stage to 6-stage boom with square / pentagonal / hexagonal cross-sectional profile.



Over-center / Holding valve

Gentrified the over center valve and holding valve for smooth and safe operation when moving the boom. Durability has been highly increased too.



Safe and stable outrigger

All models are equipped with double pilot check valves.




Main control valve

Main control valve equipped with auto-acceleration function which enhances multi-operation function.


Slewing system

Slewing reduction gear in worm gear type allows smooth swing. Implementing a low-speed and high-torque motor gives maximized efficiency.

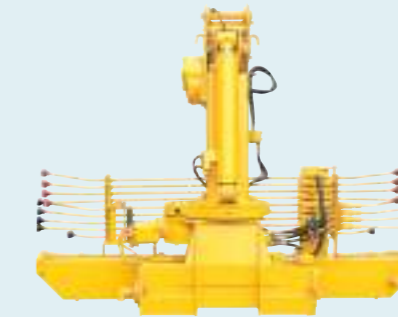

Increased durability

Re-designed swing post and frame to decrease weight, durability and the unity of the design. The simplified piping allows easy access for easy repair and maintenance.

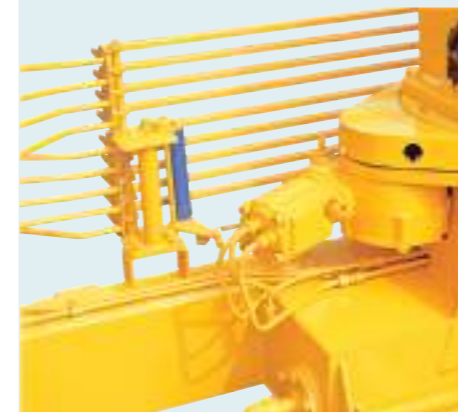


Silenced winch

By choosing a silenced winch, the operation noise is brought down to a minimum. The built-in mechanical automatic brake system allows safe operation.



Automatic acceleration system

Without using an acceleration lever, the speed can be controlled from idling to full-throttling, which saves fuel consumption and provides a better work efficiency.

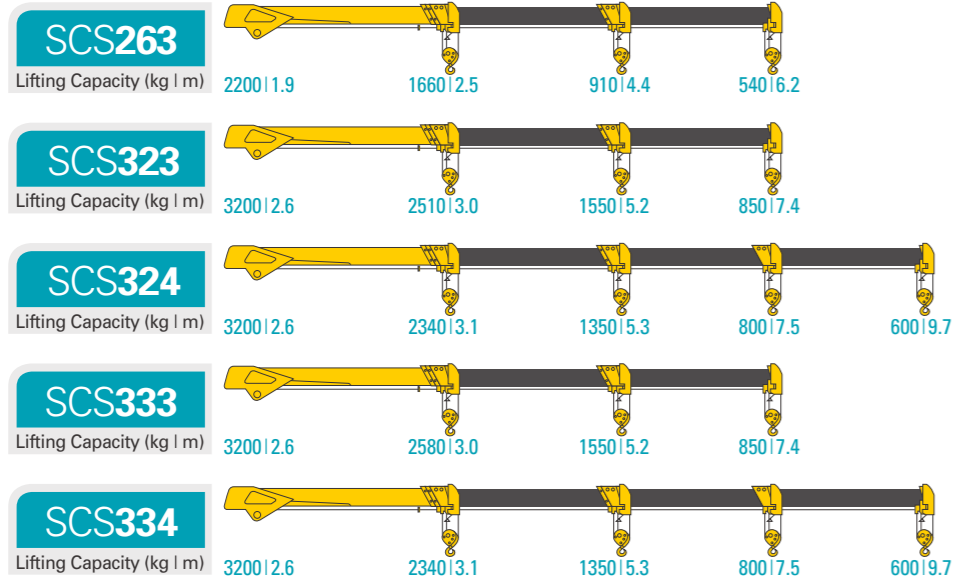


Description		Unit	SCS 263	SCS 323	SCS 324	SCS 333	SCS 334
Capacity	Max. Lifting Capacity	ton-m	4.2	8.2	8.0	8.2	8.0
	Max. Lifting Height	m	8.0	9.5	11.8	9.6	11.9
	Max. Working Radius	m	6.2	7.4	9.7	7.4	9.7
	Max. Working Height	m	8.2	10.0	12.3	10.1	12.4
Boom	Type / Section		Penta / 3	Penta / 3	Penta / 4	Penta / 3	Penta / 4
	Extending Speed	m / sec	3.7 / 11	4.4 / 14	6.6 / 14	4.4 / 14	6.6 / 14
	Raising Speed	° / sec	1-80 / 7	1-80 / 9			
Winch	Hook Speed	m / min (Layer/Line)	17 (4/3)	17 (4/4)			
	Wire Rope	ø mm / m	ø 8 x 33m	ø 8 x 80m [6xFi(29)IWRC]			
Slewing	Slewing Range		360° Continuous				
	Slewing Speed	rpm	2				
	Type		Hydraulic motor driven, Worm and spur gear reduction				
Outrigger	Type	Front	Horizontal Manual	Fully Hydraulic			
		Rear	Option	Option			
	Max. Expanded span	m	3.12	3.88		4.09	
Hydraulic System	Rated Flow	ℓ / min	37	50			
	Rated Pressure	kgf / cm ²	200	200			
	Oil Tank Capacity	ℓ	34	50			
	Applicable Chassis	ton		2.5-3.5		4.5-8.0	
Option	Aux. Boom (3m, Single-stage, Folding type)						
	Aux. Boom (5m, Double-stage, Folding type)						
	Aux. Boom (4m, Single-stage, Folding type)						
	Aux. Winch (Single line pull : 800kgf)						
	Aux. Winch (Single line pull : 1500kgf)						
	Overloading Prevention Device		•	•	•	•	•
	Remote Control (Wire / Wireless)		•	•	•	•	•
	Single Line Hook (800kgf)		•	•	•	•	•
	Single Line Hook (1500kgf)						
	Single Line Hook (2000kgf)						
	Overwinding Alarm Device		•	•	•	•	•
	Top Seat						
	Rear Outrigger		Manual		Manual, Hydraulic		
	Middle Outrigger						
Top Seat Engine Starting Device							
Oil Cooler							

Safety Devices

Pressure relief valve for hydraulic circuit, Overcenter valve, Hydraulic swing locking system, Automatic mechanical brake for which, Pilot check valve for outriggers, Hook safety latch, Boom angle indicator with load indicator, Overwinding alarm system (Option), Overloading prevention device (Option)

• The above specifications are subject to change without prior notice for improvement.

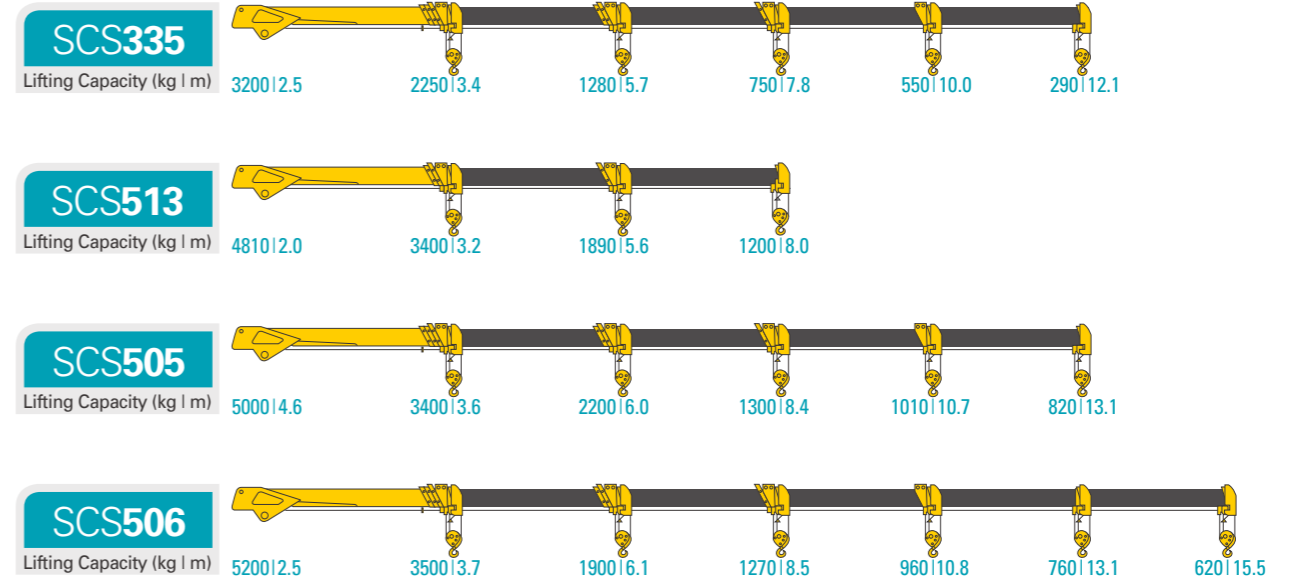

Description		Unit	SCS 335	SCS 513	SCS 505	SCS 506
Capacity	Max. Lifting Capacity	ton-m	7.7	11	14.1	13.9
	Max. Lifting Height	m (Aux. Boom)	14.2	10.1	15.4	17.7
	Max. Working Radius	m (Aux. Boom)	12.1	8	13.1	15.5
	Max. Working Height	m (Aux. Boom)	14.9	10.8	16.1	18.5
Boom	Type / Section		Hexa / 5	Square / 3	Hexa / 5	Hexa / 6
	Extending Speed	m / sec	8.68 / 23	4.8 / 17.5	11.8 / 22	
	Raising Speed	° / sec	1-80 / 9	1.5-75 / 10	1-80 / 11	
Winch	Hook Speed	m / min (Layer/Line)	17 (4/4)	10 (4/6)	15 (4/3)	
	Wire Rope	ø mm / m	ø 8 x 80m [6 x Fi(29)IWRC]	ø 8 x 70 [6 x Fi(29)IWRC]	ø 8 x 100 mm [6xFi(29)IWRC]	
Slewing	Slewing Range		360° Continuous			
	Slewing Speed	rpm	2			
	Type		Hydraulic motor driven, Worm and spur gear reduction			
Outrigger	Type	Front	Fully hydraulic	Horizontal Manual	Fully hydraulic	Fully hydraulic
		Rear	Option	Option	Option	Option
	Max. Expanded span	m	4.09	4.0	5.3	5.3
Hydraulic System	Rated Flow	ℓ / min	50	65	66	66
	Rated Pressure	kgf / cm ²	200	190	200	
	Oil Tank Capacity	ℓ	50	50	90	90
	Applicable Chassis	ton	4.5-8.0	5.0-11.5	4.5-11.5	
Option	Aux. Boom (3m, Single-stage, Folding type)					
	Aux. Boom (5m, Double-stage, Folding type)					
	Aux. Boom (4m, Single-stage, Folding type)					
	Aux. Winch (Single line pull : 800kgf)					
	Aux. Winch (Single line pull : 1500kgf)					
	Overloading Prevention Device		•	•	•	•
	Remote Control (Wire/Wireless)		•	•	•	•
	Single Line Hook (800kgf)		•	•	•	•
	Single Line Hook (1500kgf)					
	Single Line Hook (2000kgf)					
	Overwinding Alarm Device		•	•	•	•
	Top Seat					
	Rear Outrigger		Manual, Hydraulic	Manual	Manual, Hydraulic	
	Middle Outrigger					
Top Seat Engine Starting Device						
Oil Cooler						

Safety Devices

Pressure relief valve for hydraulic circuit, Overcenter valve, Hydraulic swing locking system, Automatic mechanical brake for which, Pilot check valve for outriggers, Hook safety latch, Boom angle indicator with load indicator, Overwinding alarm system (Option), Overloading prevention device (Option)

• The above specifications are subject to change without prior notice for improvement.

Medium-duty cranes ; 6 ton ~ 7.6 ton class

Lift maximum 7.6 ton and suitable for various applications in general construction and civil engineering, aerial work, electric works, port and shipyard, general transport, logistics, municipalities etc. The medium cranes can be mounted on a truck chassis with a payload of 5 ton and above.



Slewing reduction gear

In addition to the internal automatic brake system with worm reduction gear, the locking cylinder is installed as a double safety device to prevent the boom from undesired spinning while travelling.



Double derrick cylinders

Maximized the derricking power by adopting double derrick cylinders and achieved high operating efficiency by enabling the boom angle to 80 degrees.



Silent line-pull winch

Low noise, silent winch with automatic internal brake installed (SCS 263 ~ SCS 2016)
2speed winch(SCS 1015LS ~ SCS 2016)



Control valve system

Danfoss's PVG-32 valves with top-seat operation type allow smoother crane operation, especially in multi-function operation.



High efficient oil cooler

To prevent the over-heating due to the fatal damages to hydraulic components, cooler runs automatically if the oil temperature reaches a preset maximum temperature.



Reinforced body frame

The swing post has been reinforced to allow safe operation. Square box type frame structure gives durability and hardness.




Robust boom construction

Use of a high-tensile steel(840N/mm²) and optimum design by FEM provide remarkable lifting capacities and extra-strong boom strengths.



SOOSAN TELESCOPIC BOOM

SOOSAN CRANES

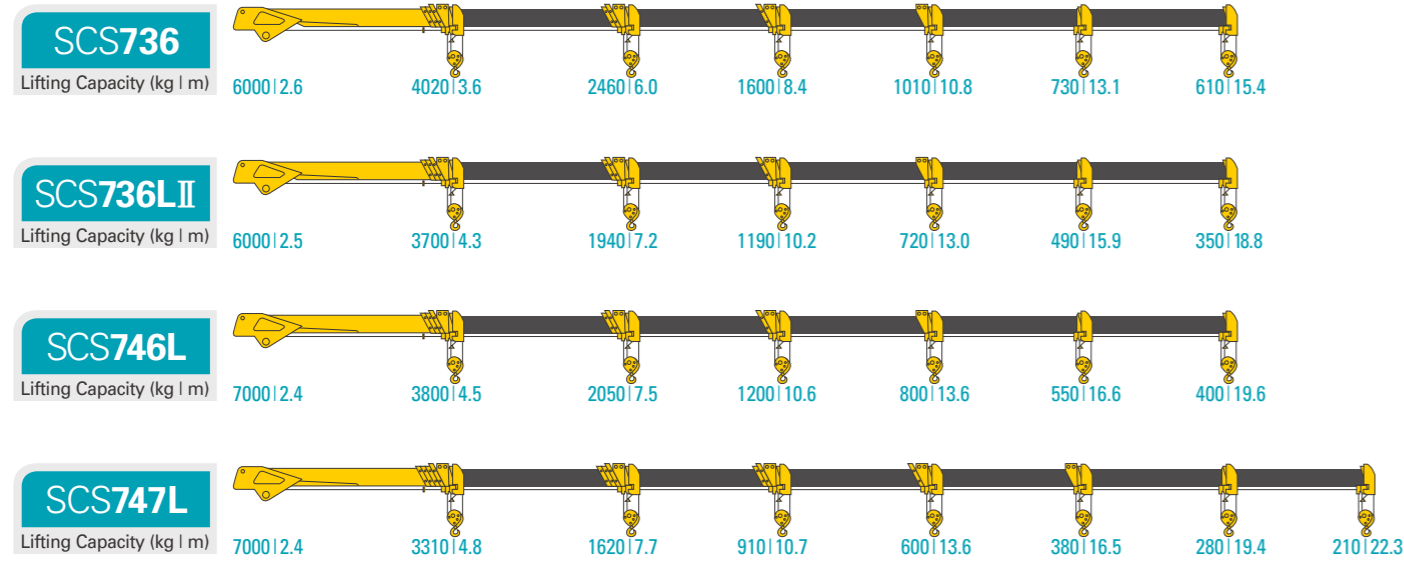


Description		Unit	SCS 736	SCS 736L II	SCS 746L	SCS 747L
Capacity	Max. Lifting Capacity	ton-m	15.0	15.0	17.5	17.5
	Max. Lifting Height	m (Aux. Boom)	17.4 (22.4)	20.8 (25.8)	21.8 (26.8)	24.5 (29.5)
	Max. Working Radius	m (Aux. Boom)	15.4 (20.4)	18.8 (23.8)	19.6 (24.6)	22.3 (27.3)
	Max. Working Height	m (Aux. Boom)	18.1 (23.1)	21.5 (26.5)	22.6 (27.6)	25.2 (29.2)
Boom	Type / Section		Hexa / 6		Hexa / 7	
	Extending Speed	m / sec	11.78 / 30	14.5 / 30	15.1 / 33	17.5 / 36
	Raising Speed	° / sec	1~76 / 15	1~76 / 15	1~80 / 12	
Winch	Hook Speed	m / min (Layer/Line)	14 (4/4)			
	Wire Rope	ø mm / m	ø10 x 120m [19 x 7 Non-rotation]		ø 10 x 120 mm	
Slewing	Slewing Range		360° Continuous			
	Slewing Speed	rpm	2			
	Type		Hydraulic motor driven, Worm and spur gear reduction			
Outrigger	Type	Front	Fully hydraulic			
		Rear	Fully hydraulic, Double box type			
Hydraulic System	Max. Expanded span	m	5.35		5.6	
	Rated Flow	ℓ / min	65			
	Rated Pressure	kgf / cm ²	90		200	
Oil Tank Capacity		ℓ	90		120	
Applicable Chassis		ton	5.0 and above		7.5 and above	
Option	Aux. Boom (3m, Single-stage, Folding type)		•	•	•	•
	Aux. Boom (5m, Double-stage, Folding type)		•	•	•	•
	Aux. Boom (4m, Single-stage, Folding type)					
	Aux. Winch (Single line pull : 1500kgf)		•	•	•	•
	Aux. Winch (Single line pull : 3000kgf)					
	Aux. Winch 2-speed (Single line pull : 2000kgf)					
	Aux. Winch : PD12C (Single line pull : 2700~4100kgf(high))					
	Overloading Prevention Device				•	•
	Remote Control (Wire/Wireless)				•	•
	Single Line Hook (800kgf)					
	Single Line Hook (1500kgf)		•	•	•	•
	Single Line Hook (2000kgf)		•	•		
	Overwinding Alarm Device		•	•	•	•
	Top Seat		•	•	•	•
	Rear Outrigger		•	•	•	•
Middle Outrigger						
Top Seat Engine Starting Device		•	•	•	•	
Oil Cooler		•	•	•	•	
Safety Devices			Pressure relief valve for hydraulic circuit, Overcenter valve, Hydraulic swing locking system, Automatic mechanical brake for which, Pilot check valve for outriggers, Hook safety latch, Boom angle indicator with load indicator, Overwinding alarm system (Option), Overloading prevention device (Option)			

• The above specifications are subject to change without prior notice for improvement.

SOOSAN TELESCOPIC BOOM

SOOSAN CRANES

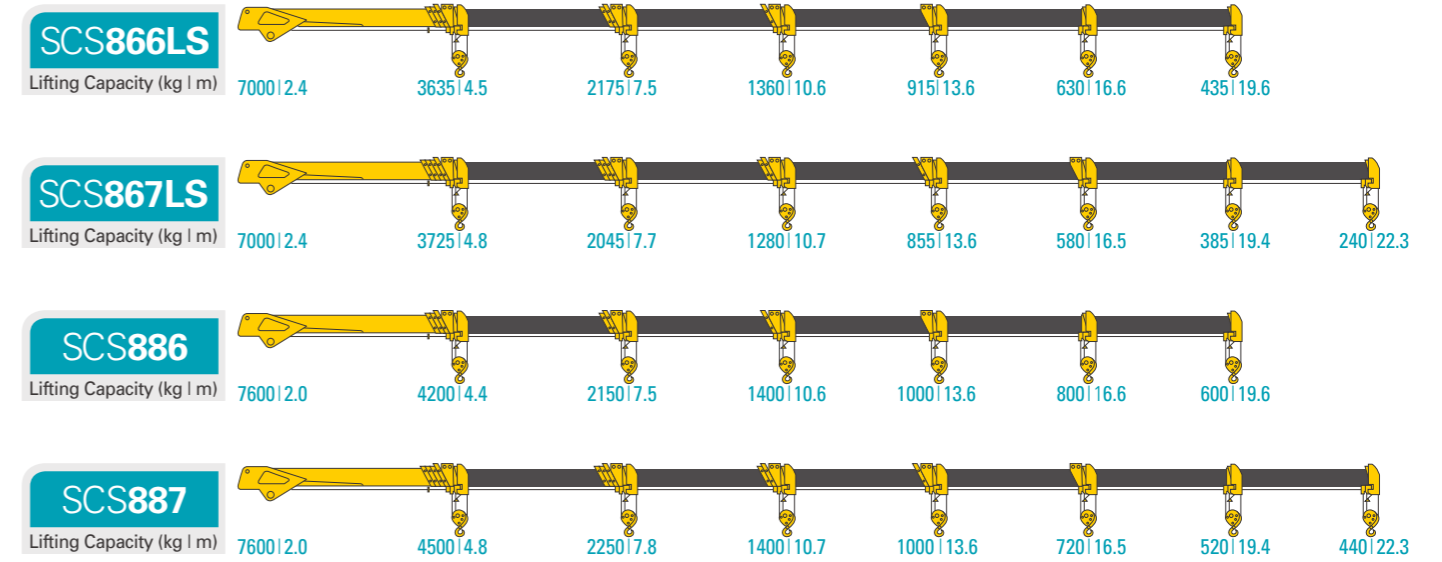

Description		Unit	SCS 866LS	SCS 867LS	SCS 886	SCS 887
Capacity	Max. Lifting Capacity	ton-m	17.5	17.5	21	21
	Max. Lifting Height	m (Aux. Boom)	21.8 (26.8)	24.5 (29.5)	21.8 (26.8)	24.5 (29.5)
	Max. Working Radius	m (Aux. Boom)	19.6 (24.6)	22.3 (27.3)	19.6 (24.6)	22.3 (27.3)
	Max. Working Height	m (Aux. Boom)	22.6 (27.6)	25.2 (30.2)	22.6 (27.6)	25.2 (30.2)
Boom	Type / Section		Hexa / 6		Hexa / 6	
	Extending Speed	m / sec	15.1 / 33		17.5 / 36	
	Raising Speed	° / sec	-16° ~ 79°/15			
Winch	Hook Speed	m / min (Layer/Line)	14 (4/4)			
	Wire Rope	ø mm / m	ø 10 x 120 mm			
Slewing	Slewing Range		360° Continuous			
	Slewing Speed	rpm	1.8			
	Type		Hydraulic motor driven, Worm and spur gear reduction			
Outrigger	Type	Front	Fully hydraulic, Double box type		Double box H-type	
		Rear	Fully hydraulic, Double box type			
Hydraulic System	Max. Expanded span	m	Front : 6.0, Rear : 4.3			
	Rated Flow	ℓ / min	65			
	Rated Pressure	kgf / cm ²	200		210	
Oil Tank Capacity		ℓ	170			
Applicable Chassis		ton	7.5 and above			
Option	Aux. Boom (3m, Single-stage, Folding type)		•	•	•	•
	Aux. Boom (5m, Double-stage, Folding type)		•	•	•	•
	Aux. Boom (4m, Single-stage, Folding type)					
	Aux. Winch (Single line pull : 1500kgf)		•	•	•	•
	Aux. Winch (Single line pull : 3000kgf)					
	Aux. Winch 2-speed (Single line pull : 2000kgf)		•	•	•	•
	Aux. Winch : PD12C (Single line pull : 2700~4100kgf(high))					
	Overloading Prevention Device		•	•	•	•
	Remote Control (Wire/Wireless)		•	•	•	•
	Single Line Hook (800kgf)					
	Single Line Hook (1500kgf)		•	•	•	•
	Single Line Hook (2000kgf)					
	Overwinding Alarm Device		•	•	•	•
	Top Seat		STD	STD	STD	STD
	Rear Outrigger		•	•	•	•
Middle Outrigger						
Top Seat Engine Starting Device		•	•	•	•	
Oil Cooler		•	•	•	•	
Safety Devices			Pressure relief valve for hydraulic circuit, Overcenter valve, Hydraulic swing locking system, Automatic mechanical brake for which, Pilot check valve for outriggers, Hook safety latch, Boom angle indicator with load indicator, Overwinding alarm system (Option)			

• The above specifications are subject to change without prior notice for improvement.

Heavy-duty cranes ; 10 ton ~ 20 ton class

Thanks to an outstanding lifting capacity and massive operating radius, cranes in the heavy-duty range are suitable for carrying out works at great heights and the toughest tasks in a variety of different sectors such as construction and civil engineering, factories, underground construction, public utilities, port, shipyard, etc.

Remarkable lifting capacity with a massive operating radius



Wireless, over-winding prevention system

The cable reel type over-winding prevention system has the problem that the sheath of the cable has peel off after a certain period. Furthermore, cable that is placed on the side of boom, always carries risks that can be cut during operation. SOOSAN's new wireless type equipment offers a smaller risk and is more convenient.



High efficient slewing reduction gear

Heavy-duty slew bearing and a high-performance planetary reduction gear increases work efficiency by giving smooth and fast operation.(SCS 2016)



High efficient dual oil cooler

A large sized dual oil cooler maximizes hydraulic operating efficiency.




High performance 2-speed auxiliary winch (Optional)

It is consisted of 2-speed piston motor and planetary reduction gear and a built-in multi-disk brake system allows both efficiency and safe operation, as well as high precision operation.




Optimized design

The optimum design through load-stress distribution simulation is analyzed by finite element method. It shows the finest performance in any environment due to an excellent lifting capacity and working radius.

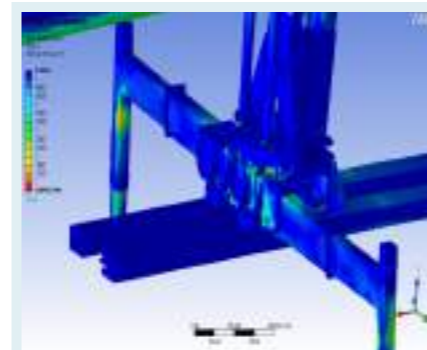


Optimization of 3D design process

By stress distribution testing, Soosan telescopic cranes which are manufactured with optimization of design comes into its own in any job site.

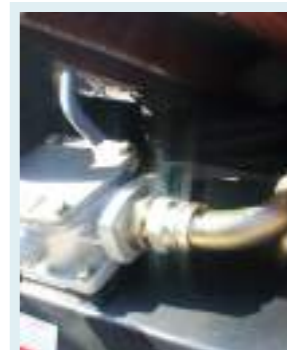

High quality return filter

An efficient return filter purifies the return oil and maintains a clean hydraulic system.

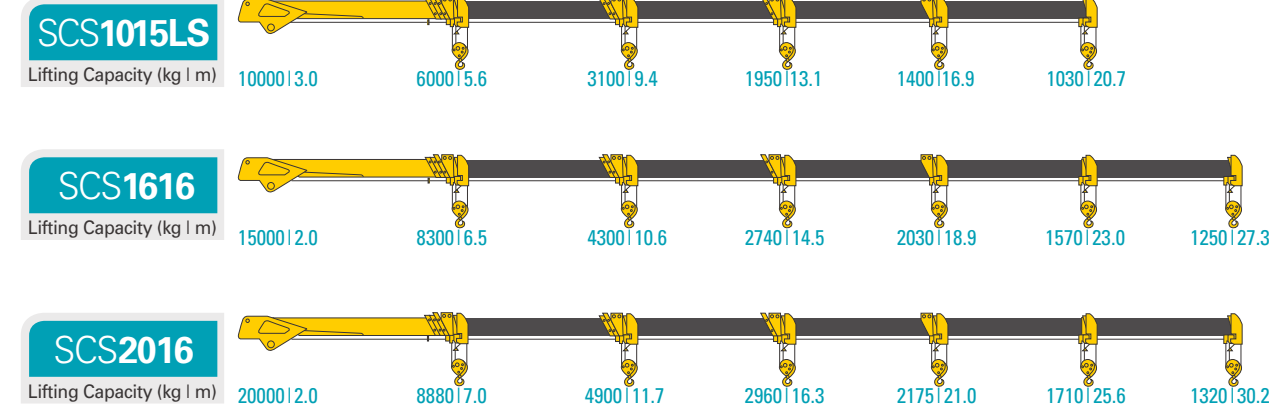

Description	Unit	SCS 1015LS	SCS 1616	SCS 2016	
Capacity	Max. Lifting Capacity	ton-m	36.0	53.8	65.0
	Max. Lifting Height	m (Aux. Boom)	23 (27)	30.1 (35.1)	32.2 (37.2)
	Max. Working Radius	m (Aux. Boom)	20.7 (24.9)	27.1 (32.1)	30.2 (35.2)
Boom	Max. Working Height	m (Aux. Boom)	24.5 (28.5)	31.1 (36.1)	33.7 (38.7)
	Type / Section		HEXA / 5	HEXA / 6	
	Extending Speed	m / sec	15.1 / 40	20.4 / 45	21.5 / 55
Winch	Raising Speed	° / sec	0-81 / 20	-12- + 80 / 40	-11- + 80 / 30
	Hook Speed	m / min (Layer/Line)	low:13, high:23 (4/4)		low:9.2, high:16 (4/4)
	Wire Rope	ø mm / m	ø 14 x 100m		ø 14 x 120m
Slewing	Slewing Range		360° Continuous		
	Slewing Speed	rpm	2	1.8-2.0	1.8
	Type		Hydraulic motor driven, Worm and planetary gear reduction		Hydraulic motor driven, planetary gear reduction
Outrigger	Type	Front	Fully hydraulic (2 section)		
		Rear	Fully hydraulic, Double box type		
Hydraulic System	Max. Expanded span	m	6.18	7.4	
	Rated Flow	ℓ / min	100 x 100		
	Rated Pressure	kgf / cm ²	210		
Oil Tank Capacity	ℓ	250	270		
Applicable Chassis	ton	11.0 and above	19.0 and above (4-wheel steering)	25.0 and above (4-wheel steering)	

Option	SCS 1015LS	SCS 1616	SCS 2016
Aux. Boom (3m, Single-stage, Folding type)			
Aux. Boom (5m, Double-stage, Folding type)			
Aux. Boom (4m, Single-stage, Folding type)	•	•	•
Aux. Winch 2-speed (Single line pull : 3000kgf)	•	•	•
Aux. Winch : BG8 (Single line pull : 2.2-3.2ton)	•	•	•
Aux. Winch : PD12C (Single line pull : 2700-4100kgf(High))	•	•	•
Overloading Prevention Device	•	•	•
Remote Control (Wire/Wireless)	•	•	•
Single Line Hook (800kgf)			
Single Line Hook (1500kgf)			
Single Line Hook (2000kgf)	•	•	•
Overriding Alarm Device	•	•	•
Top Seat	STD	STD	STD
Rear Outrigger	•	•	•
Middle Outrigger			
Top Seat Engine Starting Device	•	•	•
Oil Cooler	•	•	•

Safety Devices Pressure relief valve for hydraulic circuit, Overcenter valve, Hydraulic swing locking system, Automatic mechanical brake for which, Pilot check valve for outriggers, Hook safety latch, Boom angle indicator with load indicator, Overriding alarm system (Option), Overloading prevention device (Option)



• The above specifications are subject to change without prior notice for improvement.

Soosan crane auger

- Multifunctional equipment for carrying, installing or removal of utility poles, electric and telecommunication facilities.
- Foundation work and material handling for general construction, civil engineering, public utilities etc.
- Combination of crane and powerful auger.
- High efficient spur reduction gear.
- Powerful, high-speed winch.
- Pentagonal 3-stage, high tensile steel boom.
- Easy to operate.



Model	SAC 2501	
Applicable truck chassis (payload)	ton	3.5 ton and above
Digging diameter	mm	350
Drilling depth	m	1.3 (Max 2.6 with built-in extension shaft)
Auger torque	Kg.m	300
Max lifting capacity	-	2.1 ton at 1.5m
Max working radius	m	7
Max working height	m	9.5
Rated flow	ℓ / min	37
Rated pressure	bar	200
Boom		
Cross section profile		Square
Number of boom stage		3
Slewing		360° continuous

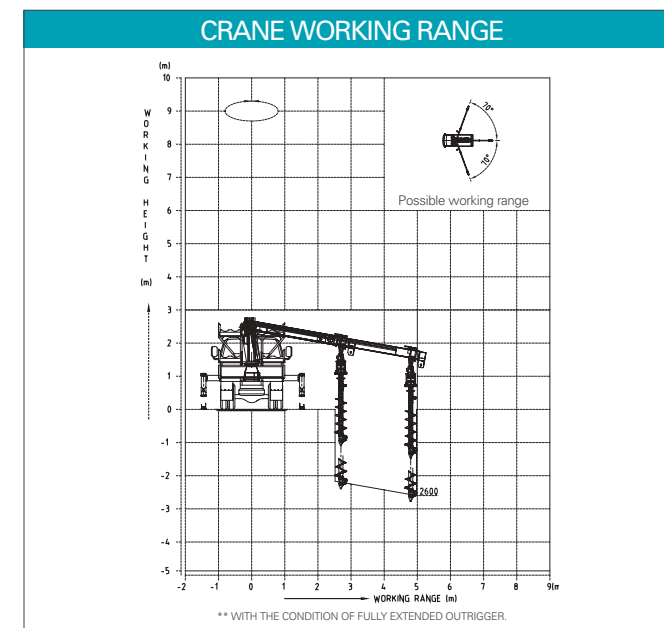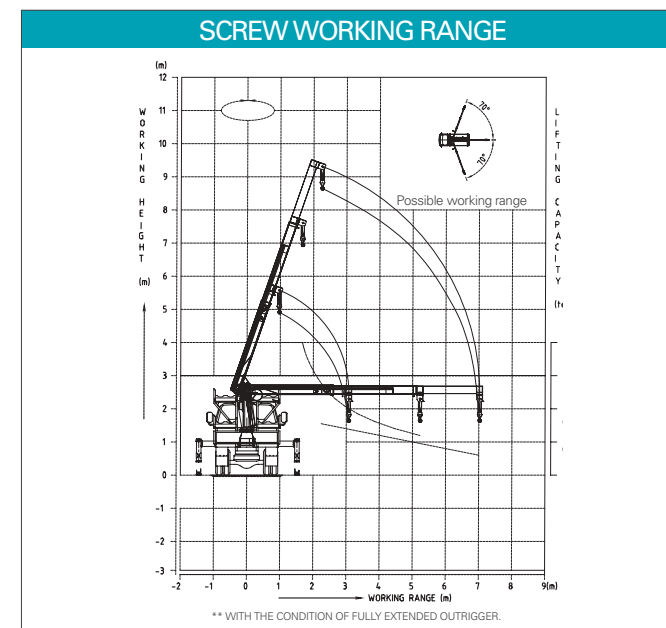

Soosan articulated boom type cranes

Combination of versatile boom geometry and hydraulic attachments such as orange grapples, brick-stone grapples, pallet forks makes the crane ideal for various material handling jobs including waste and scrap recycling, military logistics, public utilities etc.



Model	SK 11000P		SK 11000LP		SK 13000	
Applicable truck chassis (payload)	ton	4.5 ton and above	4.5 ton and above	8 ton and above		
Max lifting capacity	ton	4.7 tons at 2.3m	4.2 tons at 2.5m	5.6 tons at 2.5m		
Max working radius	m	7.6	8.0	8.6		
Max working height	m	10.5	11	12.3		
Rated flow	ℓ/min	50	50	63		
Rated pressure	bar	250	250	240		
Boom type		2-articulated + 2-telescopic	2-articulated + 2-telescopic	2-articulated + 2-telescopic		
Swing angle	° (degrees)	410	410	410		

Stationary base (Pedestal cranes)

Applications and features

- Providing customized load handling solutions for power plants, fishing boats, barges, ports, shipyards, oil and gas fields, railroad maintenance, factories, waste and scrap recycling, etc.
- Lifting capacities from 2.2 tons up to 20 tons.

* All models of SCS & SK Series cranes are available for stationary base.

[Well-testing in oil fields]

